

BV


Power Wire 电源线

■ 产品描述

- 额定温度: 70℃
- 额定电压: 300V/500V
- 导体: 0.75-1mm² 单支或绞合镀锡或裸铜
- 绝缘: 无铅聚氯乙烯(J-70)
- 参考标准: JB/T8734.2-2016
- 适用范围: 用于照明及电源系统
- 颜色: 棕, 红, 橙, 黄, 绿, 蓝, 紫, 灰, 白, 黑, 黄/绿等

■ PRODUCT DESCRIPTION

- Rate temperature: 70℃
- Rate voltage: 300V/500V
- Conductor: 0.75-1mm² (Solid or stranded, tinned or bare copper)
- Insulation: lead PVC(J-70)
- Reference standard: JB/T8734.2-2016
- Application: For electric power and lighting
- Color: Brown, Red, Orange, Yellow, Green, Blue, Purple, Grey, White, Black, Green/Yellow, etc

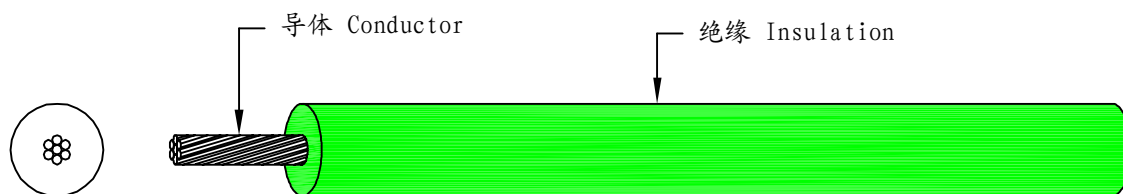

■ 印字 MARKING

A131677 CCC BV 300/500V { }mm² 东莞市耀博电子有限公司

■ 产品结构 CABLE CONSTRUCTION



导体 CONDUCTOR		绝缘 INSULATION			最大导体电阻 MAX. COND. RESISTANCE (Ω/km, 20℃, DC)	最小绝缘电阻 MIN. INSUL. RESISTANCE (MΩ/km, 70℃)	标准长度 STANDARD PUT-UP	
规格 mm ²	构造 CONSTRUCTION (No. /mm)	外径 DIA. (mm)	厚度规定值 THICKNESS (mm)	外径上限 MAX. O. D. (mm)			英制 Ft/Roll	公制 M/Roll
0.75	24/0.2	1.13	0.6	2.6	24.5	0.012	1000	305
1.0	32/0.2	1.31	0.6	2.8	18.1	0.010	1000	305