

UL2725


Computer Cable 电脑线

■ 产品描述

- 额定温度: 60°C/80°C
- 额定电压: 30V
- 导体: 单支或绞合镀锡或裸铜
- 绝缘: PVC
- 外被: PVC
- 屏蔽: 镀锡或裸铜编织屏蔽
- 阻燃等级: VW-1及CSAFT1、FT2
- 参考标准: UL758 UL1581 UL2556
- 适用范围:
- 用于一般电子、电器设备内部连接线
- 颜色:
- 棕, 红, 橙, 黄, 绿, 蓝, 紫, 灰, 白, 黑, 黄/绿等

■ PRODUCT DESCRIPTION

- Rate temperature: 60°C/80°C
- Rate voltage: 30V
- Conductor: Solid or stranded, tinned or bare copper
- Insulation: PVC
- Jacket: PVC
- Shield: Tinned or bare copper wire braid shield
- Flame test: VW-1&CSAFT1、FT2
- Reference standard: UL758 UL1581 UL2556
- Application: For internal wiring of electronic and electrical equipment
- Color: Brown, Red, Orange, Yellow, Green, Blue, Purple, Grey, White, Black, Green/Yellow, etc

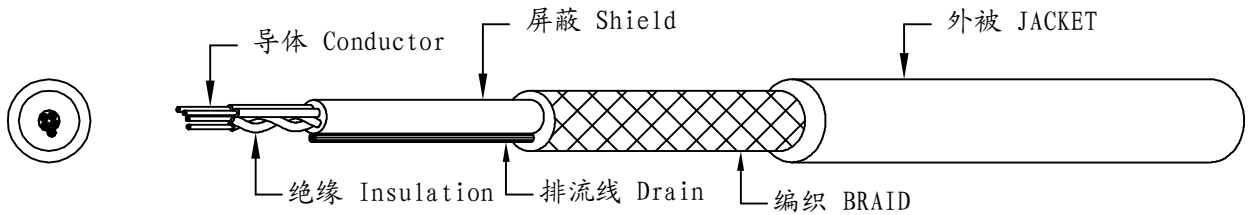

■ 印字 MARKING

AWM 2725 ()AWG/1P+()AWG/2C 80°C 30V VW-1 E332441 YAOBO cAWM ()AWG/1P+()AWG/2C I/II A 80°C 30V FT1

■ 产品结构 CABLE CONSTRUCTION



品名 NAME	导体 CONDUCTOR				绝缘 INSULATION		屏蔽 SHIELD	排流线 DRAIN	编织 BRAID	外被 JACKET		最大导体电阻 MAX. COND. RESISTANCE (Ω/km, 20°C, DC)	标准长度 STANDARD PUT-UP	
	规格 AWG	构造 CONSTRUCTION (No. /mm)	外径 DIA. (mm)	芯数 (No)	厚度 THICKNESS (mm)	外径 DIA. (mm)	构造 (No. /mm)	构造 (No. /mm)	构造 (No. /mm)	厚度 THICKNESS (mm)	外径 DIA. (mm)		英制 Ft/Ro11	公制 M/Ro11
USB 1P+2C	28	7/0.127	0.39	1P	0.26	0.9	Al-mylar	7/0.127	16/5/0.10	0.55	4.20	237.25	1000	305
	28	7/0.127	0.39	2C	0.26	0.9	Al-mylar					237.25		
USB 1P+2C	28	7/0.127	0.39	1P	0.26	0.9	Al-mylar	7/0.16	16/5/0.10	0.65	4.50	237.25	1000	305
	26	7/0.160	0.48	2C	0.26	1.0	Al-mylar					148.94		
USB 1P+2C	28	7/0.127	0.39	1P	0.26	1.0	Al-mylar	7/0.2	16/5/0.10	0.55	4.90	237.25	1000	305
	24	7/0.203	0.61	2C	0.26	1.1	Al-mylar					93.25		
USB 1P+2C	28	7/0.127	0.39	1P	0.26	0.9	Al-mylar	7/0.254	16/6/0.10	0.81	5.10	237.25	500	153
	22	7/0.254	0.76	2C	0.26	1.3	Al-mylar					55.0		
USB 1P+2C	28	7/0.127	0.39	1P	0.26	0.9	Al-mylar	7/0.32	16/6/0.10	0.81	5.10	237.25	500	153
	20	7/0.32	0.94	2C	0.28	1.5	Al-mylar					34.6		