

UL2678


Flat Ribbon Cable 排线

■ 产品描述

- 额定温度: 105°C
- 额定电压: 150V
- 导体: 单支或绞合 36~20AWG 镀锡或裸铜
- 绝缘: 聚氯乙烯 (PVC)
- 阻燃等级: VW-1及CSAFT1、FT2
- 参考标准: UL758 UL1581 UL2556
- 适用范围:
- 用于一般电子、电器设备内部连接线

■ PRODUCT DESCRIPTION

- Rate temperature: 105°C
- Rate voltage: 150V
- Conductor: 36~20AWG (Solid or stranded, tinned or bare copper)
- Insulation: PVC
- Flame test: VW-1&CSAFT1、FT2
- Reference standard: UL758 UL1581 UL2556
- Application: For internal wiring of electronic and electrical equipment

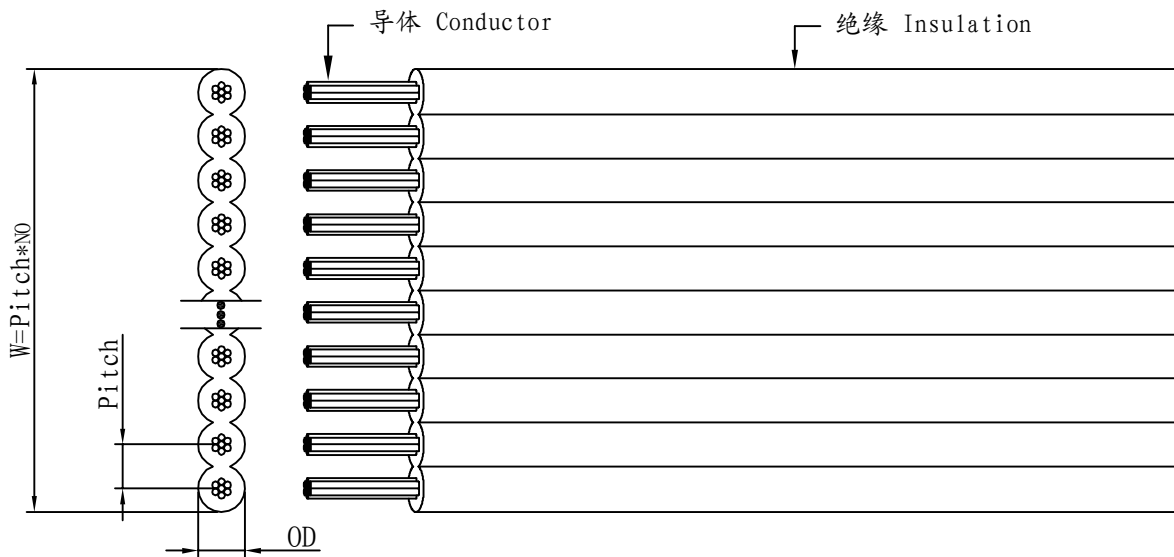

■ 印字 MARKING

AWM 2678 ()AWG 105° C 150V VW-1 E332441 YAobo cUL AWM I A 105° C 150V FT1

■ 产品结构 CABLE CONSTRUCTION



导体 CONDUCTOR		绝缘 INSULATION		最大导体电阻 MAX. COND. RESISTANCE (Ω/km, 20°C, DC)	标准长度 STANDARD PUT-UP				
规格 AWG	间距 Pitch (mm)	构造 CONSTRUCTION (No. /mm)	外径 DIA. (mm)		芯数 (No)	厚度 THICKNESS (mm)	外径 OD (mm)	英制 Ft/Ro11	公制 M/Ro11
30	0.635	7/0.1	0.30	2-64	0.18	0.68	376.96	250	76.2
28	1.0	7/0.127	0.39	2-64	0.18	0.75	237.25	250	76.2
26		7/0.16	0.49	2-64	0.18	0.85	148.94	250	76.2
24		11/0.16	0.61	2-50	0.20	1.0	93.25	250	76.2